

PERMANENT MAGNET ADAPTIVE VARIABLE FREQUENCY BOOSTER PUMP

PMA Series


- Well water lifting and water tower water filling.
Living water supply and garden irrigation.
- Pipeline pressure boosting and supporting equipment
solar energy water supply system, water heater, etc.



Specifications

รุ่นสินค้า	PMA-150	PMA-300	PMA-400
Power (W)	148	296	432
Cycle (Hz)	50	50	50
Voltage (V)	DC40	DC40 + 40	DC48 + 48
Max Head (M)	28	40	52
Max Flow Rate (L/min)	53	67	80
In let (in.)	1	1	1
Outlet (in.)	1	1	1
N.W. (kg)	11.2	12.5	14.5
G.W. (kg)	12.2	13.5	15.5
Packaging Size (mm)	330x212x238	350x250x320	350x250x320

Model Analysis

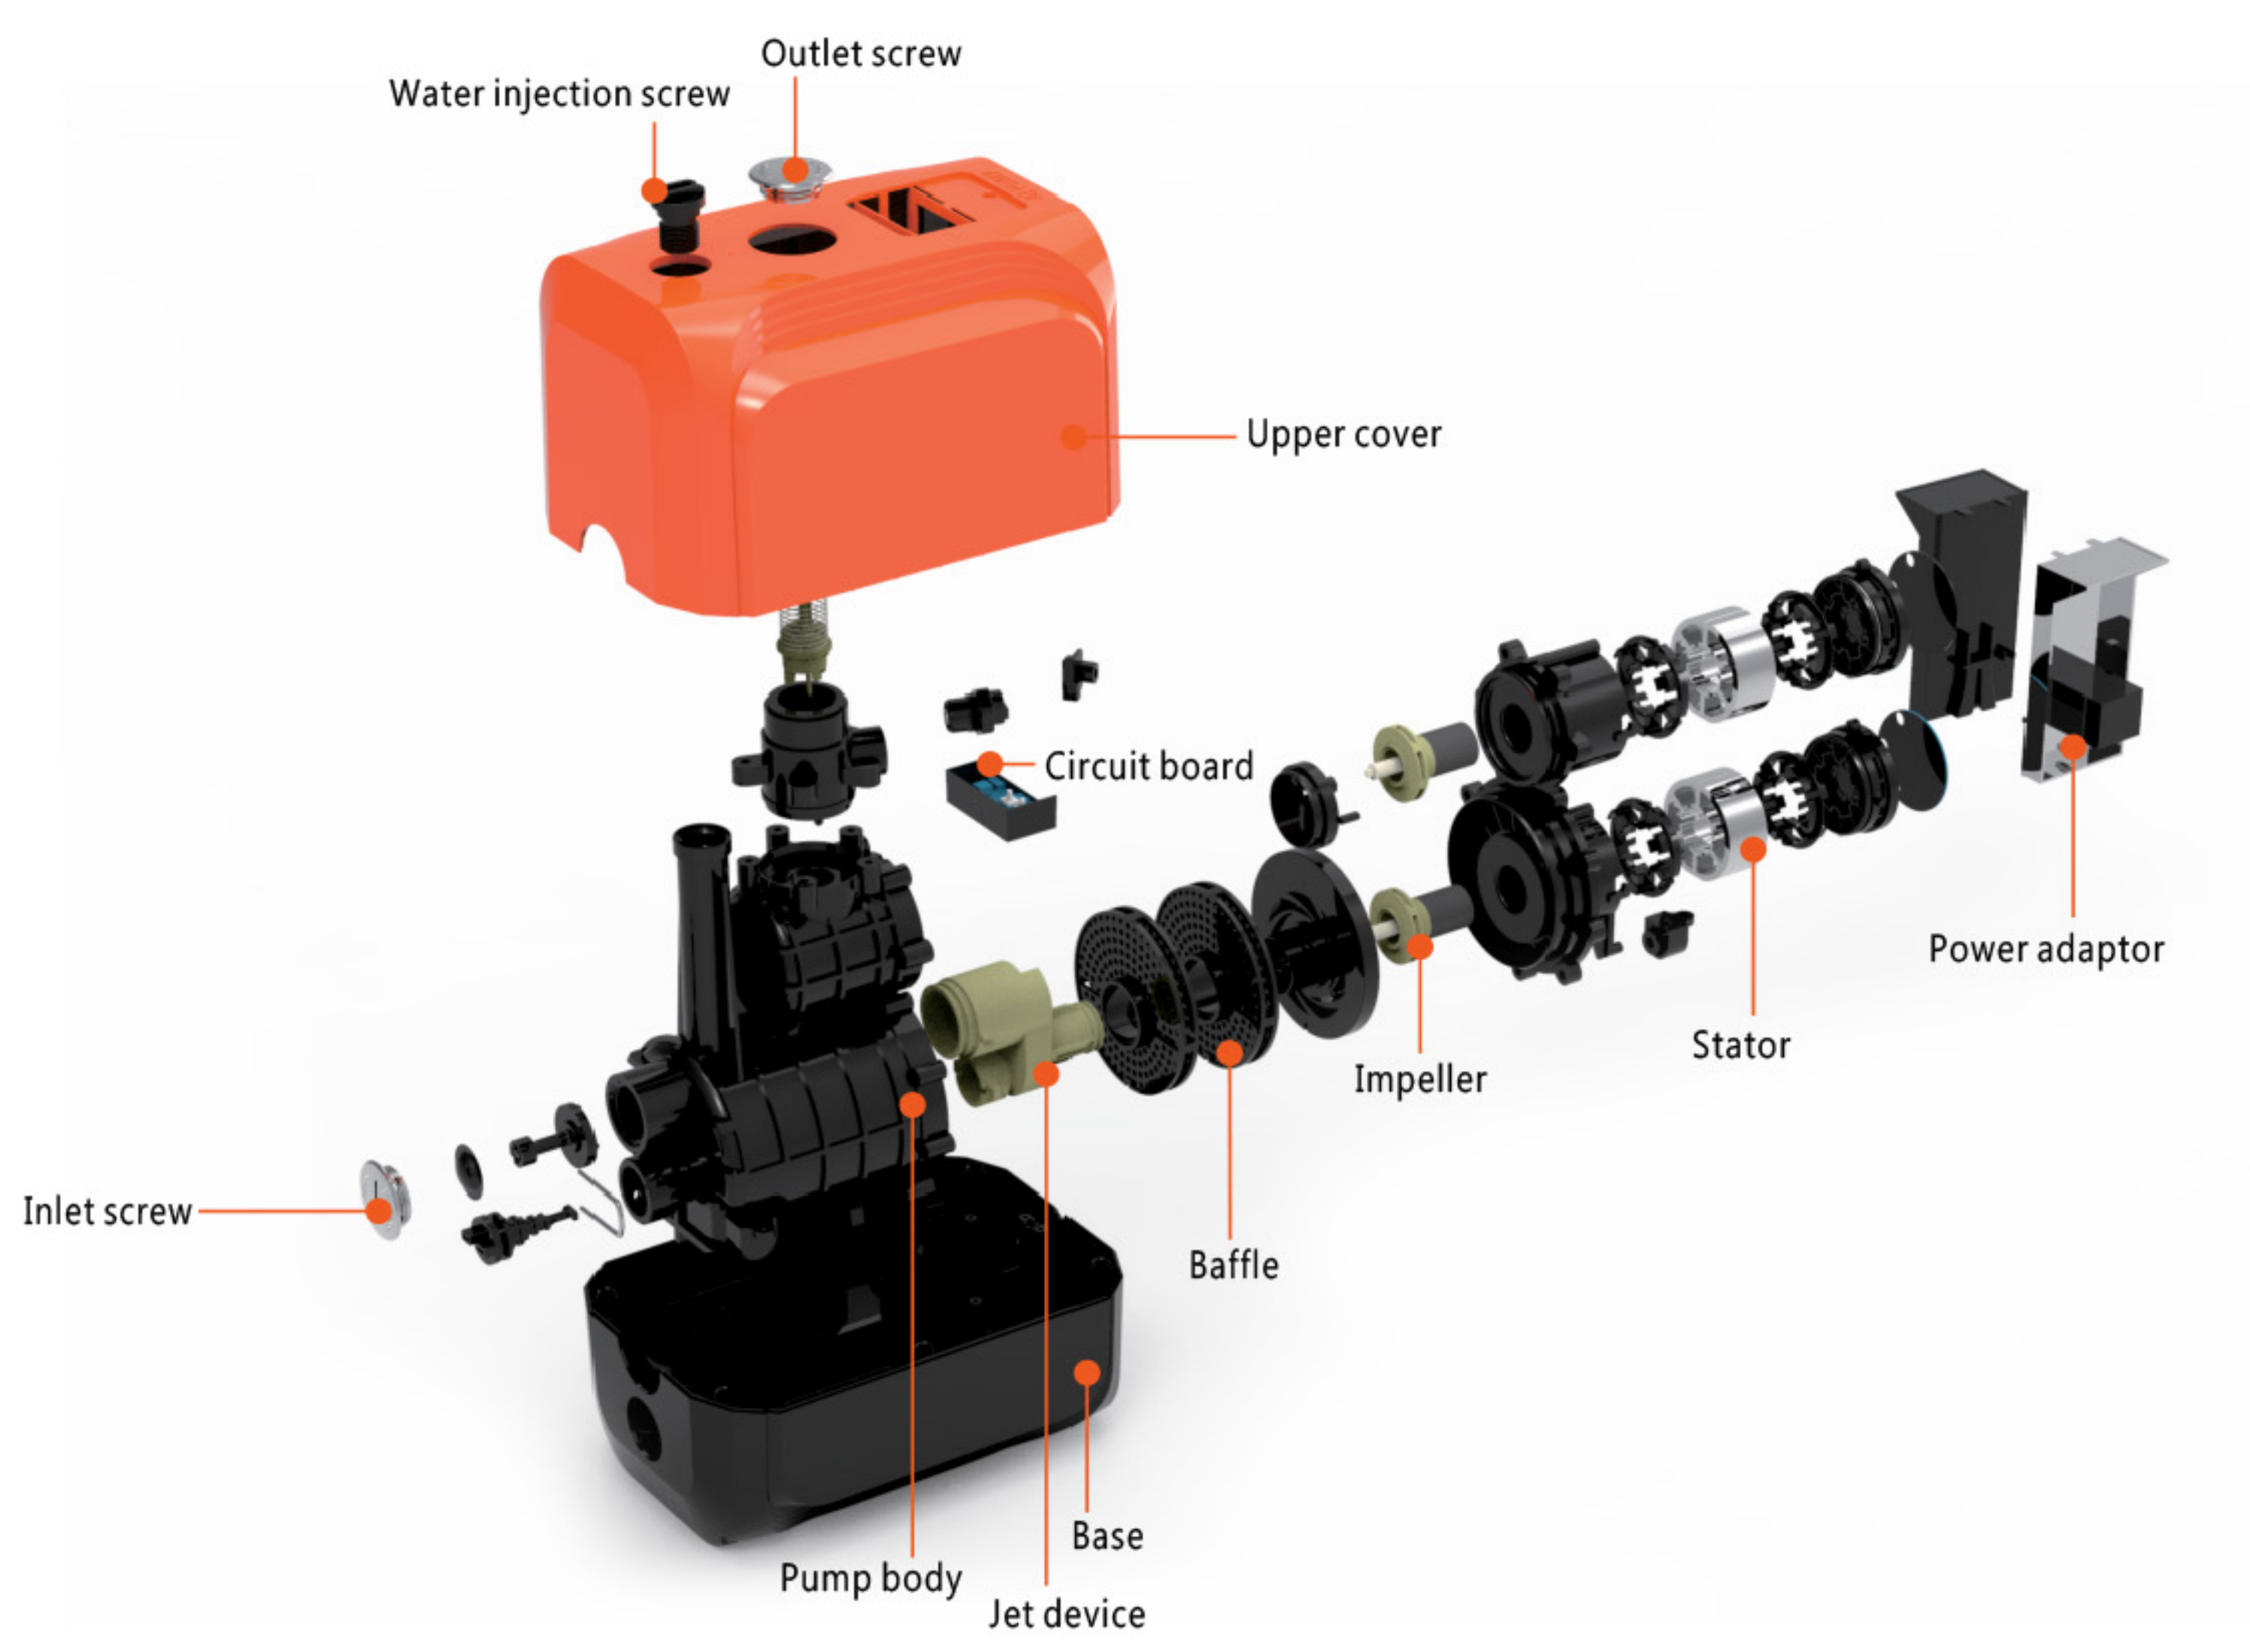

หมายเหตุ: ภาพแสดงชุด อุปกรณ์รุ่น PMA-300 และPMA-400

Teature

- Equipped with a Permanent Magnet Motor for higher efficiency and energy.
- Maximum suction depth 9.5 meters.High-grade insulation (Class H) and IP65
- Non-corrosive water flow design to ensure clean, rust-free water.Programmable timer function, ideal for automated water tank refilling.
- Innovative tankless system: No pressure tank, no bearings, no mechanical seals, and no cooling impellers, yet provides stable water pressure.
- Dry-run protection to prevent motor damage when there is no water supply.Safe low-voltage operation with DC 30-48V.
- Super-quiet performance at only 50 dB.
- Easy installation and disassembly for convenient maintenance.

Performance curves

