

# FP 400/600

## Intelligent Permanent Magnet Booster Pump

### INTELLIFLOW SILENT & RUST-FREE



FP


### Features

- Canned permanent magnet motor
- The inflow components are made of engineering plastics
- Visual interface, easy to operate
- 11 layers of intelligent protection
- Wide-voltage operation: 165V - 280V
- Running sound ≤ 45dB
- Protection class: IP44
- Max. Suction Head: +5m
- Conveying Medium Temperature: 2°C ~ 60°C

### Application

- Full house pressurization
- High-rise water supply
- Sprinkler pressurization
- Water tower supply

### Model Instruction

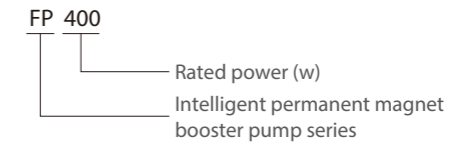

### Technical Data n=5700 r/min

Model	Power	Outlet Diameter	Max. flow	Max head	Weight	Pump Size	Voltage Frequency
	W	mm	m <sup>3</sup> /h	m			
FP400	400	25	4.5	30	6.2	340x180x270	Single-Phase 220V 50Hz/60Hz
FP600	600	25	4.5	42			

### Performance Curves

