

Centrifugal Pump DHM Series


Suitable for applications requiring high water flow, such as municipal water supply, irrigation, agriculture, dormitories, apartments, hotels, and condominiums. It can be installed both indoors and outdoors where additional water pressure is required.



Specifications

Model	DHM6A	DHM6AF
Power (W)	2200 (3HP)	2200 (3HP)
Cycle (Hz)	50	50
Voltage (V)	220-230	220-230
Current (A)	15.1	15.1
Max Head (m)	18.5	18.5
Max Flow Rate (L/m)	1100	1100
Depth (m)	8	8
Inlet (in.)	3	3
Outlet (in.)	3	3
Outlet Type	Threaded	Flanged
N.W. (kg)	35	39
G.W. (kg)	37	41
Packaging Size (mm)	480*280*320	480*280*320

Dimension

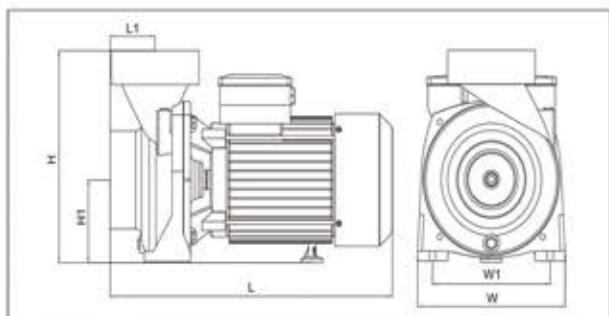

Model	L (mm)	L1 (mm)	W (mm)	W1 (mm)	H (mm)	H1 (mm)
DHM6A	260	42	167	130	216	87.5
DHM6AF	303.5	47	192	159	242	98.5

Feature



100% Pure Copper Winding

The motor features a 100% pure copper winding for excellent electrical conductivity and is equipped with Thermal Overload Protection to help prevent motor burnout.



Genuine Brass Impeller

The closed-type impeller is made of genuine brass for excellent rust resistance, delivering high water flow, strong pressure, high head, and long-distance water transfer.



Stainless Steel Shaft

The rotor shaft is made of genuine AISI 304 stainless steel, providing excellent durability and corrosion resistance. It helps prevent rust and offers high resistance to breakage for long-lasting operation.



Mechanical Seal

The carbon-ceramic mechanical seal helps prevent leakage and provides excellent resistance to pressure, heat, corrosion, and contaminants or sediment present in the water.

Performance Curve

