

Self-Priming Jet Pump JET(GM) Series


Suitable for agricultural applications requiring high-head and long-distance water transfer, as well as supplying water for domestic consumption in homes and office buildings.



Specifications

Model	JET-750GM	JET-1100GM
Power (W)	750 (1HP)	1100 (1.5HP)
Cycle (Hz)	50	50
Voltage (V)	220-230	220-230
Current (A)	5.2	7.3
Max Head (m)	42	48
Max Distance (m)	420	480
Max Flow Rate (L/m)	85	116
Depth (m)	8	8
Inlet (in.)	1	1¼
Outlet (in.)	1	1
N.W. (kg)	13.5	23
G.W. (kg)	14	24
Packaging Size (mm)	460*200*230	570*230*290

Dimension

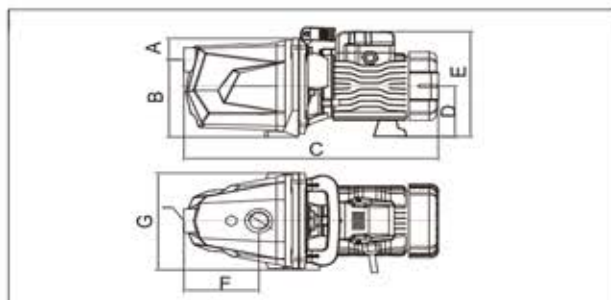


Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
JET750GM	32.5	152.5	415	96	119	132	180
JET1100GM	34.5	167	434	112	232	161	206

Feature



100% Pure Copper Winding

The motor features a 100% pure copper winding for excellent electrical conductivity and is equipped with Thermal Overload Protection to help prevent motor burnout.



PPO Impeller

The closed-type PPO plastic impeller is designed to deliver strong water pressure, high head, long-distance water transfer, and high flow capacity.



Stainless Steel Shaft

The rotor shaft is made of genuine AISI 304 stainless steel, providing excellent corrosion resistance and helping extend the pump's service life.



Mechanical Seal

The carbon-ceramic mechanical seal helps prevent leakage and provides excellent resistance to pressure, heat, corrosion, and contaminants or sediment present in the water.

Performance Curve

