

Self-Priming Plastic Jet Pump JET(P) Series


Highly suitable for drinking water applications and clean water supply systems in residential buildings, office buildings, and agricultural applications.



Specifications

รุ่นสินค้า	JET750P
Power (W)	750 (1HP)
Cycle (Hz)	50
Voltage (V)	240
Current (A)	5.2
Max Head (m)	50
Max Distance (m)	500
Max Flow Rate (L/m)	60
Depth (m)	8
Inlet (in.)	1
Outlet (in.)	1
N.W. (kg)	10.5
G.W. (kg)	11
Packaging Size (mm)	459*191*244

Dimension

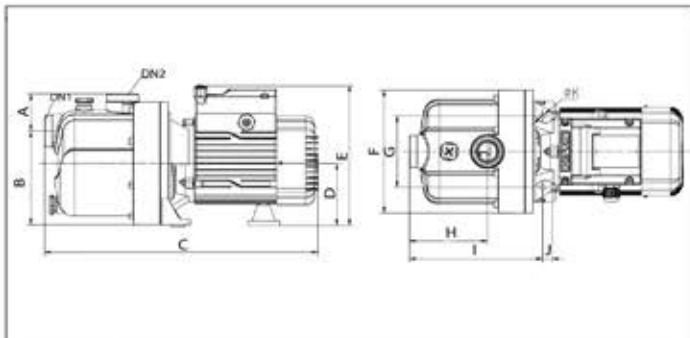

Model	A	B	C	D	E	F	G	H	I	J	K	DN1	DN2
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
JET750P	58	146	427	97	207	191	111	112	208	15	9	25	25

Feature



Eco-Nylon Pump Casing

The pump casing is made of eco-friendly nylon, offering excellent strength and durability while remaining rust-free.



Stainless Steel Shaft (AISI 304)

The rotor shaft is made of genuine AISI 304 stainless steel, providing excellent corrosion resistance and helping extend the pump's service life.



100% Pure Copper Winding

The motor features a 100% pure copper winding for excellent electrical conductivity and is equipped with Thermal Overload Protection to help prevent motor burnout.

Performance Curve

