

Self-Priming Jet Pump JET(SC) Series


Suitable for agricultural applications requiring high-head and long-distance water transfer, as well as supplying water for domestic consumption in homes and office buildings.



Specifications

Model	JET-750SC
Power (W)	750 (1HP)
Cycle (Hz)	50
Voltage (V)	220-230
Current (A)	5.2
Max Head (m)	50
Max Distance (m)	500
Max Flow Rate (L/min)	73
Depth (m)	8
Inlet (in.)	1
Outlet (in.)	1
N.W. (kg)	10
G.W. (kg)	10.5
Packaging Size (mm)	390*220*250

Dimension

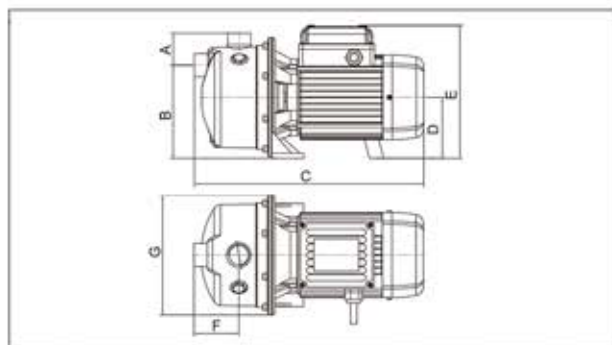

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
JET750SC	49	145	360	95	207	72	186

Feature



100% Pure Copper Winding

The motor features a 100% pure copper winding for excellent electrical conductivity and is equipped with Thermal Overload Protection to help prevent motor burnout.



Stainless Steel Impeller and Pump Head

The closed-type impeller and pump head are made of genuine stainless steel for excellent rust and corrosion resistance. The design delivers strong water pressure, high head, long-distance water transfer, and high flow capacity, making it suitable for food-grade applications.



Stainless Steel Shaft

The rotor shaft is made of genuine AISI 304 stainless steel, providing excellent corrosion resistance and helping extend the pump's service life.



Mechanical Seal

The carbon-ceramic mechanical seal helps prevent leakage and provides excellent resistance to pressure, heat, corrosion, and contaminants or sediment present in the water.

Performance Curve

