

Submersible Sewage Pump LQS(P) Series

Suitable for pumping and draining wastewater from factories, residential buildings, hotels, and restaurants.


- Suitable for transferring wastewater between holding tanks in small wastewater treatment systems.
- Suitable for water circulation applications such as fountains, waterfalls, and koi ponds.




Specifications

Model	LQS750P
Power (W)	750 (1HP)
Cycle (Hz)	50
Voltage (V)	220-230
Current (A)	5.2
Max Head (m)	12.5
Max Flow Rate (L/m)	367
Outlet (in.)	1
N.W. (kg)	10.5
G.W. (kg)	10.8
Packaging Size (mm)	419*220*280

Dimension

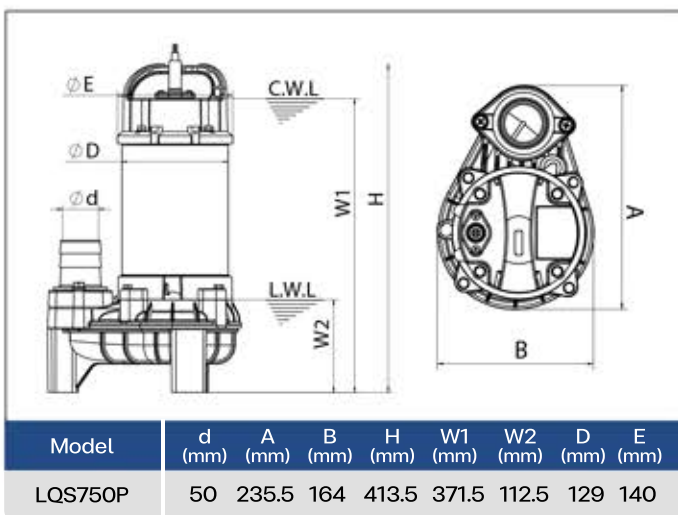

Feature



100% Pure Copper Winding

The motor features a 100% pure copper winding and a built-in thermal sensor. The system automatically shuts down when excessive heat is detected, helping prevent motor burnout.



High-Grade Bearings

High-grade bearings help ensure stable pump operation, even under high-temperature operating conditions.



Double Mechanical Seal

The double mechanical seal helps prevent water from entering the motor and provides excellent resistance to pressure, heat, corrosion, and contaminants or sediment in the water.



Resin casing and impeller

The pump casing and impeller are made of resin, providing better resistance to wastewater conditions than cast iron. The resin construction also reduces the overall weight of the pump, making it easier to handle, transport, and maintain.

Performance Curve

