

SWIMMING POOL PUMP SWP Series

Suitable for swimming pool water circulation and filtration systems.

- Suitable for marine aquaculture applications.
- Suitable for water circulation systems such as fountains, ponds, and waterfalls.
- Liquid Temperature Range: 4°C-50°C



Specifications

Model	SWP-750	SWP-900	SWP-1100	SWP-1500	SWP-2200
Power (W)	750	900	1100	1500	2200
Cycle (Hz)	50	50	50	50	50
Voltage (V)	230	230	230	230	230
Max Head (m)	13	15	17	18	22
Q Max (m³/h)	18	19.5	21	23.5	36
Inlet (in.)	2	2	2	2	2
Outlet (in.)	2	2	2	2	2
N.W. (kg)	9.4	10	10.8	11.9	20
Packaging Size (mm)	557*265*365	557*265*365	557*265*365	557*265*365	640*285*370

Feature



Genuine Copper Coil

The motor features a 100% pure copper winding for excellent electrical conductivity. The motor frame is made of aluminum, providing efficient heat dissipation and a lightweight design.



pH Range: 6.5-8.5

Resistant to acidic and alkaline conditions within a pH range of 6.5-8.5.



The shaft is made of stainless steel.


The rotor shaft is made of genuine AISI 304 stainless steel, providing excellent durability and corrosion resistance. It helps prevent rust and offers high resistance to breakage for long-lasting operation.



Depth

Maximum Suction Depth: 3 meters

Dimension

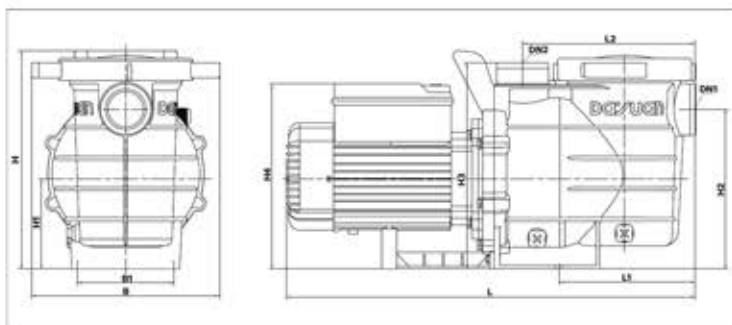

Model	L	L1	L2	B	B1	H	H1	H2	H3	H4	DN1	DN2
SWP-750	555	200	253	276	142	320	132	234	302	235	G2	G2
SWP-900	555	200	253	276	142	320	132	234	302	235	G2	G2
SWP-1100	555	200	253	276	142	320	132	234	302	235	G2	G2
SWP-1500	555	200	253	276	142	320	132	234	302	235	G2	G2
SWP-2200	600	200	253	276	142	320	132	234	302	273	G2	G2

Performance Curve

